



Rated voltage table (AC & DC Voltage. Cat III Installation)		
	Pollution degree	
Mounting screws	**2**	**3**
Non isolated	1000V	630V
Isolated (ex. PA6)	2000V	1000V
WARNING. The shown values are indicative, the designer / user must verify the correct performance in their application.		

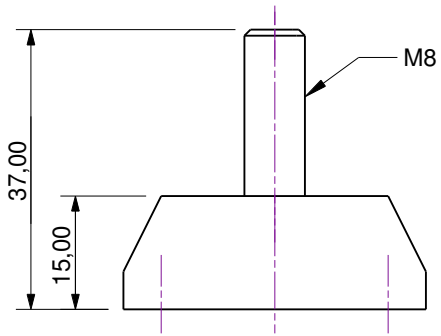

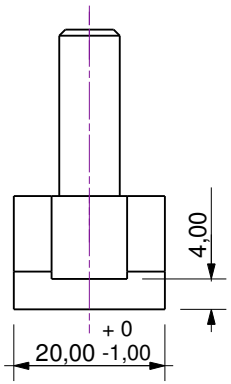

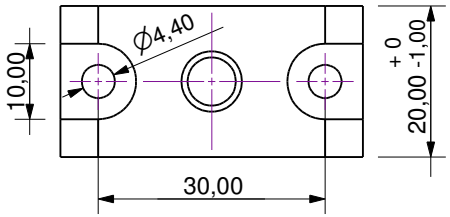



ESCALA 1:1		INDICE DE TOLERANCIAS				LONGITUDINALES					ANGULARES				RECTIFICADORES GUASCH, S.A.
		0.5-6 ± 0.1	6-30 ± 0.2	30-120 ± 0.3	120-400 ± 0.5	400-1000 ± 0.8	1000-2000 ± 1.2	2000-4000 ± 2	0-10 ± 5'	10-50 ± 10'	50-120 ± 20'	120-400 ± 30'			
			Fecha:	Nombre:											
		Dib.	05.06.21	Jordi Joan Argemí											
		Comp.	05.06.21	Jordi Joan Argemí											

NOMBRE PIEZA/COMPONENTE. OBSERVACIONES.

PLM8RG (M8) ISOLATOR

Plano num. RGM010642

HOJA: 01/01

EDI: 02