IXYS


Fast Recovery Epitaxial Diode (FRED) Module


MEO 500-06 DA

V_{RRM} = 600 V
I_{FAVM} = 514 A
t_{rr} = 250 ns

Preliminary data

V_{RSM} V	V_{RRM} V	Type
600	600	MEO 500-06DA





Symbol	Test Conditions	Maximum Ratings	
I_{FRMS}	T_C = 75°C	726	A
I_{FAVM} ①	T_C = 75°C; rectangular, d = 0.5	514	A
I_{FRM}	t_P < 10 µs; rep. rating, pulse width limited by T_{VJM}	2680	A
I_{FSM}	T_{VJ} = 45°C; t = 10 ms (50 Hz), sine	4800	A
	t = 8.3 ms (60 Hz), sine	5280	A
	T_{VJ} = 150°C; t = 10 ms (50 Hz), sine	4320	A
	t = 8.3 ms (60 Hz), sine	4750	A
I^2t	T_{VJ} = 45°C; t = 10 ms (50 Hz), sine	115200	A^2s
	t = 8.3 ms (60 Hz), sine	117100	A^2s
	T_{VJ} = 150°C; t = 10 ms (50 Hz), sine	93300	A^2s
	t = 8.3 ms (60 Hz), sine	94800	A^2s
T_{VJ}		-40...+150	°C
T_{stg}		-40...+125	°C
T_{Smax}		110	°C
P_{tot}	T_C = 25°C	1750	W
V_{ISOL}	50/60 Hz, RMS t = 1 min	3000	V~
	I_{ISOL} ≤ 1 mA t = 1 s	3600	V~
M_d	Mounting torque (M6)	2.25-2.75/20-25	Nm/lb.in.
	Terminal connection torque (M6)	4.50-5.50/40-48	Nm/lb.in.
d_S	Creeping distance on surface	12.7	mm
d_A	Strike distance through air	9.6	mm
a	Maximum allowable acceleration	50	m/s^2
Weight		150	g

Symbol	Test Conditions	Characteristic Values (per diode) typ.	max.	
I_R	T_{VJ} = 25°C V_R = V_{RRM}		24	mA
	T_{VJ} = 25°C V_R = 0.8 • V_{RRM}		6	mA
	T_{VJ} = 125°C V_R = 0.8 • V_{RRM}		160	mA
V_F	I_F = 300 A; T_{VJ} = 125°C		1.17	V
	T_{VJ} = 25°C		1.36	V
	I_F = 520 A; T_{VJ} = 125°C		1.41	V
	T_{VJ} = 25°C		1.52	V
V_{T0}	For power-loss calculations only		0.85	V
r_T			1.09	mΩ
R_{thJH}	DC current		0.114	K/W
R_{thJC}	DC current		0.071	K/W
t_{rr}	I_F = 600 A; T_{VJ} = 100°C	250	300	ns
I_{RM}	V_R = 300 V; T_{VJ} = 25°C		88	A
	-di/dt = 800 A/µs; T_{VJ} = 100°C		132	A


① I_{FAVM} rating includes reverse blocking losses at T_{VJM}, V_R = 0.6 V_{RRM}, duty cycle d = 0.5
Data according to IEC 60747
IXYS reserves the right to change limits, test conditions and dimensions

Features
- International standard package with DCB ceramic base plate
- Planar passivated chips
- Short recovery time
- Low switching losses
- Soft recovery behaviour
- Isolation voltage 3600 V~
- UL registered E 72873

Applications
- Antiparallel diode for high frequency switching devices
- Free wheeling diode in converters and motor control circuits
- Inductive heating and melting
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Advantages
- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Dimensions in mm (1 mm = 0.0394")

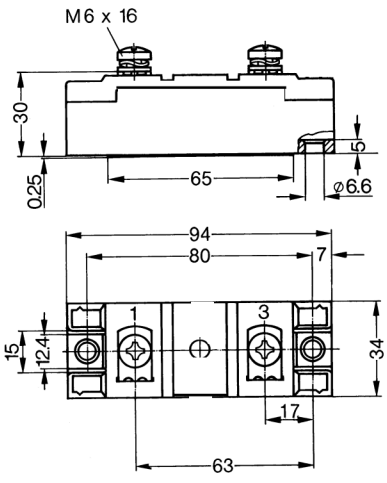

749

© 2000 IXYS All rights reserved

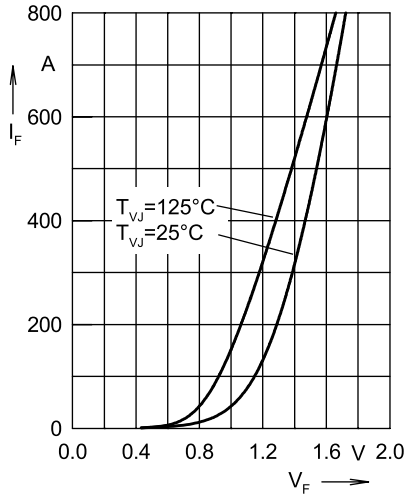


Fig. 1 Forward current I_F versus max. voltage drop V_F per leg

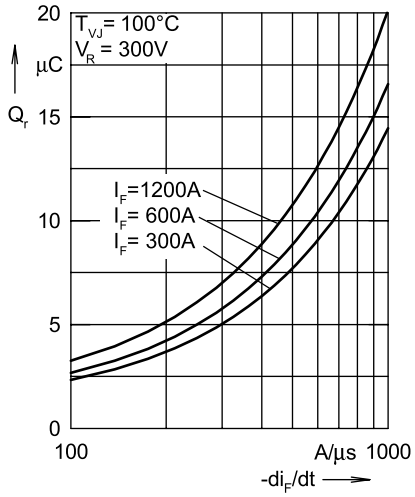


Fig. 2 Typ. reverse recovery charge Q_r versus $-di_F/dt$

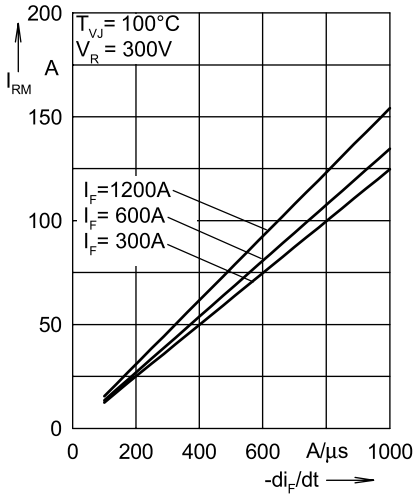


Fig. 3 Typ. peak reverse current I_{RM} versus $-di_F/dt$

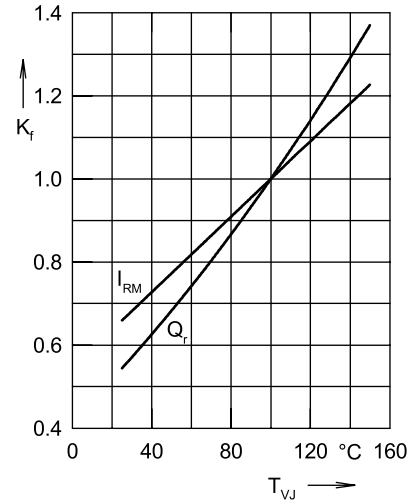


Fig. 4 Dynamic parameters Q_r, I_{RM} versus junction temperature T_{VJ}

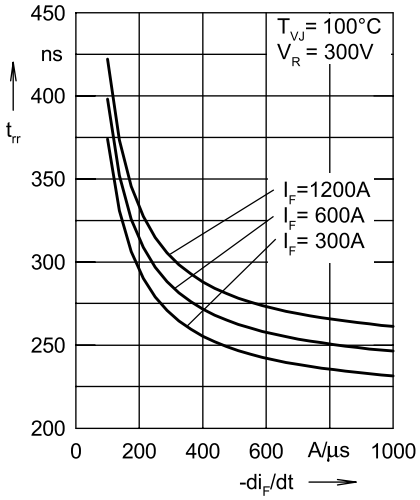


Fig. 5 Typ. recovery time t_{rr} versus $-di_F/dt$

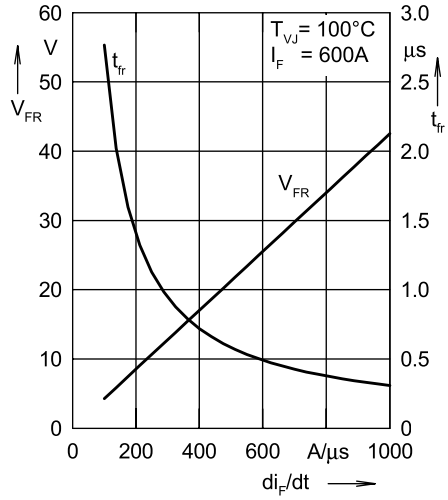


Fig. 6 Typ. peak forward voltage V_{FR} and t_{fr} versus di_F/dt

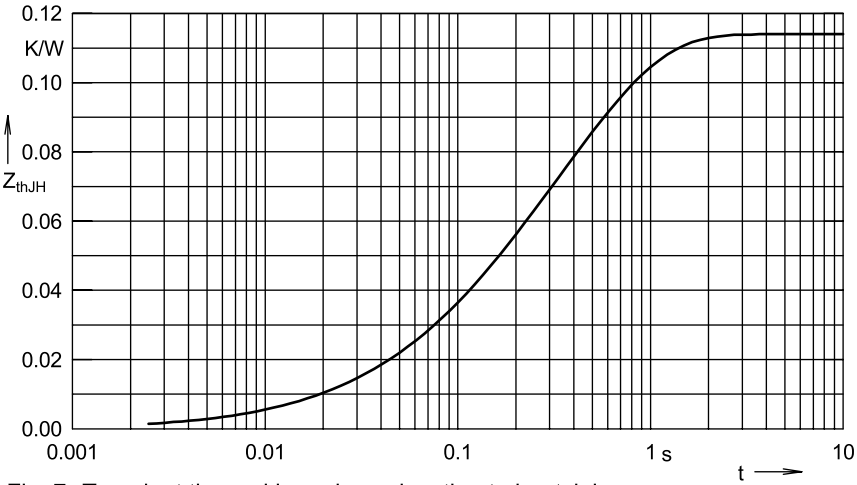


Fig. 7 Transient thermal impedance junction to heatsink

Constants for Z_{thJS} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.001	0.08
2	0.004	0.024
3	0.027	0.112
4	0.082	0.464

814

© 2000 IXYS All rights reserved