df Electric

RAPIDPLUS


HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

Rapidplus®

gS
NH

semiconductor protection fuse links

NH NH000

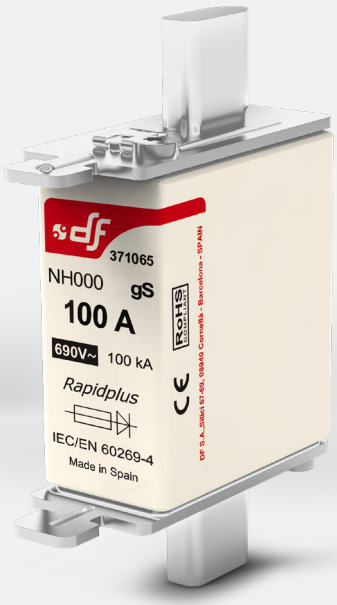




NH000 NH00 NH1 NH2 NH3

PROTECTING THE WORLD

dfelectric.es



gS
NH
semiconductor protection fuse links

NH000

RAPIDPLUS

Rapidplus®

NH000

RATED VOLTAGE
690V AC

RATED CURRENT
20A...100A

BREAKING CAPACITY
100kA

STANDARDS
IEC/EN 60269-1
IEC/EN 60269-4



Rapidplus®
NH fuse links for semiconductors

RAPIDPLUS NH gS fuse links are capable to clearing all types of overcurrents, overloads as well as shortcircuits, thus the fuse links protect semiconductors as well as cables and all switchgear of installation.

They are optimized to have reduced power dissipations that allow the utilization of a wide range of fuse bases, disconnectors and fuse switches.


The range comprises the following fuse links:

→ **Size NH000 690V AC 20A to 100A**

Typical application comprise protection of semiconductors (diodes, thyristors, triacs, etc) used in power rectifiers, UPS, converters, motor drives (AC and DC), soft starters, solid state relays, photovoltaic inverters, welding inverters and any application where it is necessary to protect semiconductor devices.

RoHS COMPLIANT

Dimensions

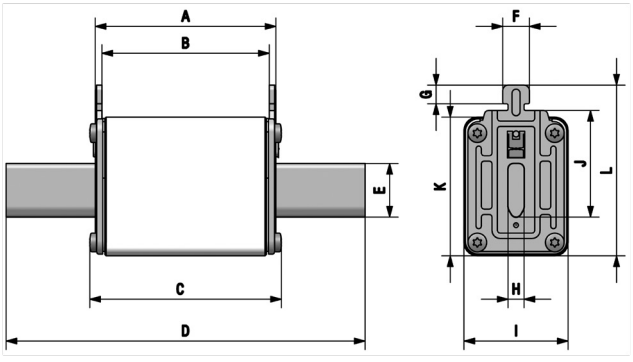


A	B	C	D	E	F	G	H	I	J	K	L
49	45	52	78,5	15	10	9,5	6	21	35	40	53

Weight 120gr

Range

In (A)	REFERENCE	PACKING Uni /BOX
20	**371025**	3/90
25	**371030**	3/90
32	**371035**	3/90
40	**371045**	3/90
50	**371050**	3/90
63	**371055**	3/90
80	**371060**	3/90
100	**371065**	3/90



gS NH

semiconductor protection fuse links

NH000

RAPIDPLUS

Rapidplus®

Technical data

Rated voltage	690V AC 440V DC (L/R=10ms)
Rated current	20A...100A
Rated breaking capacity	100kA @690V AC 30kA @440V DC
Utilization category	gS
Storage temperature	-40°C ... 80°C
Operating temperature *	-25°C ... 60°C

* For ambient temperatures higher than 25ºC it is necessary to apply a derating in maximum current.

Standards

IEC/EN 60269-1
IEC/EN 60269-4
RoHS Compliant


Materials

Body	Steatite C221
Contact blades	Copper or brass (silver plated)
Plates	Aluminium
Screws	Zinc plated steel


Power dissipation


I_n (A)	POWER DISSIPATION In (W)	POWER DISSIPATION 0,8 · In (A^2S)	PREARCING I^2t (A^2S)	OPERATING I^2t (A^2S)
20	5,1	2,9	31	116
25	5,6	3,2	49	181
32	6,6	3,9	96	355
40	7,2	4,2	196	724
50	8,5	5,1	331	1224
63	9,1	5,3	782	2897
80	11	6,3	1420	5270
100	12,5	7,1	2400	8880


t-I characteristics

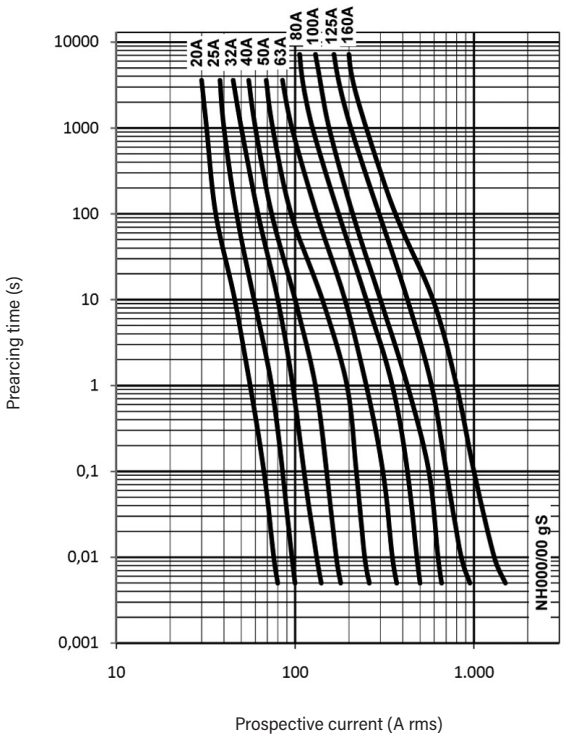

Cut-off characteristics

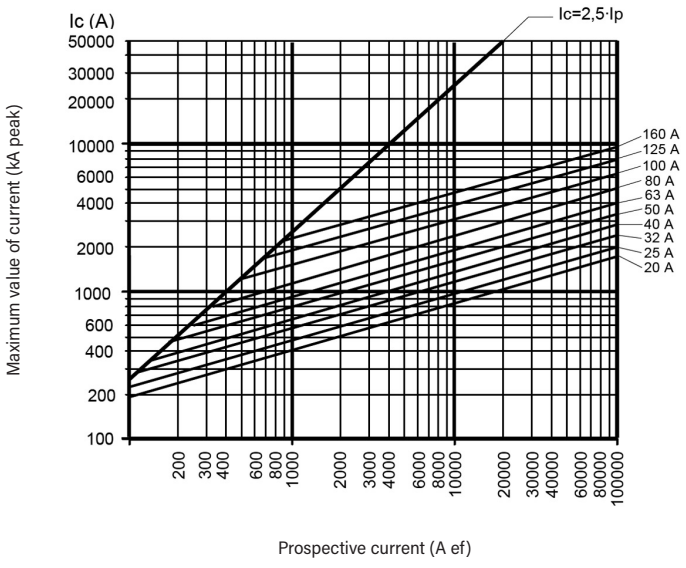




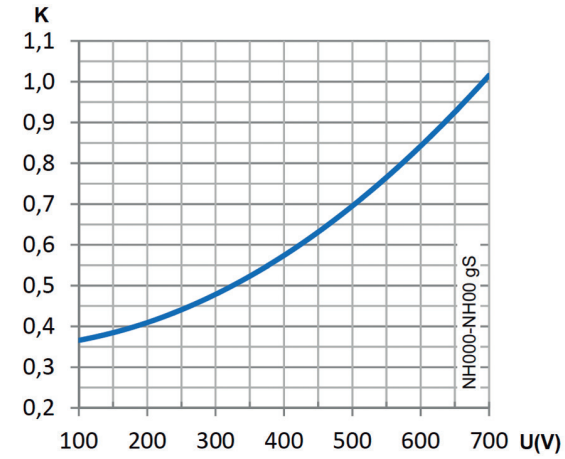

I²t Correction factor

The total clearing I²t at rated voltage and at power factor of 0,15 are given in the electrical characteristics.


For other voltages, the clearing I²t is found by multipliying by correction factor, K.

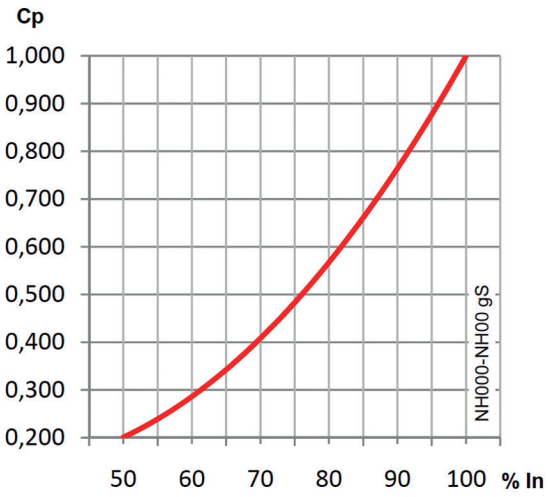

Correction factor for power loss

Watts loss at rated current are given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated value.

The correction factor Cp, is given as a function of the RMS load current Ib in % of the rated current.

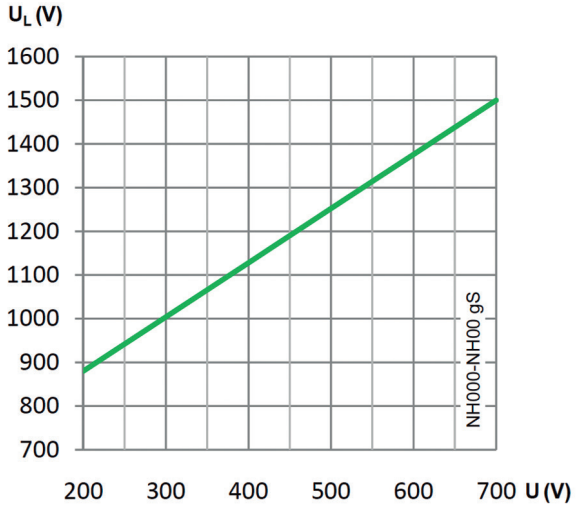

Peak arc voltage

This curve gives the peak arc voltage, U_L, wich may appear across the fuse during its operation as a function of the applied working voltage, Eg (RMS) at a power factor of 0,15.

HEAD OFFICE AND FACTORY
SILICI, 67-69
08940 CORNELLA DE LLOBREGAT
BARCELONA
SPAIN
Tel. +34 93 377 85 85
Fax +34 93 377 82 82

INTERNATIONAL SALES
Tel. +34 93 475 08 64
Fax +34 93 480 07 75
export@dfelectric.es

NATIONAL SALES
Tel. 93 475 08 64
Fax 93 480 07 76
comercial@dfelectric.es

dfelectric.es



The data reflected in this technical record are subject to the correct installation of the product in accordance with manufacturer's instructions, relevant installation standards and professional practices, maintained and used in applications for which they were made.

DF ELECTRIC retains the right to change the dimensions, specifications, materials or design of its products at any time with or without notice.

©2021 DF Electric. All rights reserved

PROTECTING THE WORLD

FABRICADO EN ESPAÑA
MADE IN SPAIN