
IXYS

Polar™ HiPerFET™ Power MOSFET


IXFN32N120P

V_{DSS} = 1200V
I_{D25} = 32A
$R_{DS(on)}$ ≤ 310mΩ
t_{rr} ≤ 300ns

N-Channel Enhancement Mode
Avalanche Rated
Fast Intrinsic Diode



miniBLOC
E153432



G = Gate D = Drain
S = Source

Either Source Terminal S can be used as the Source Terminal or the Kelvin Source (Gate Return) Terminal.

Symbol	Test Conditions		Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C		1200	V
V_{DGR}	T_J = 25°C to 150°C, R_{GS} = 1MΩ		1200	V
V_{GSS}	Continuous		±30	V
V_{GSM}	Transient		±40	V
I_{D25}	T_C = 25°C		32	A
I_{DM}	T_C = 25°C, Pulse Width Limited by T_{JM}		100	A
I_A	T_C = 25°C		16	A
E_{AS}	T_C = 25°C		2	J
dv/dt	$I_S \le I_{DM}$, $V_{DD} \le V_{DSS}$, $T_J \le 150°C$		20	V/ns
P_D	T_C = 25°C		1000	W
T_J			-55 ... +150	°C
T_{JM}			150	°C
T_{stg}			-55 ... +150	°C
T_L	1.6mm (0.062 in.) from Case for 10s		300	°C
T_{SOLD}	Plastic Body for 10s		260	°C
V_{ISOL}	50/60 Hz, RMS	t = 1 minute	2500	V~
	$I_{ISOL} \le$ 1mA	t = 1 second	3000	V~
M_d	Mounting Torque		1.5/13	Nm/lb.in.
	Terminal Connection Torque		1.3/11.5	Nm/lb.in.
Weight			30	g

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = 3mA	1200			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 1mA	3.5		6.5	V
I_{GSS}	V_{GS} = ±30V, V_{DS} = 0V			±300	nA
I_{DSS}	$V_{DS} = V_{DSS}$, V_{GS} = 0V			50	μA
	T_J = 125°C			5	mA
$R_{DS(on)}$	V_{GS} = 10V, $I_D = 0.5 \bullet I_{D25}$, Note 1			310	mΩ

Features

- International Standard Package
- miniBLOC, with Aluminium Nitride Isolation
- Isolation Voltage 2500 V~
- High Current Handling Capability
- Fast Intrinsic Diode
- Avalanche Rated
- Low $R_{DS(on)}$ HDMOS™ Process

Advantages

- Easy to Mount
- Space Savings
- High Power Density

Applications

- High Voltage Switch-Mode and Resonant-Mode Power Supplies
- High Voltage Pulse Power Applications
- High Voltage Discharge Circuits in Lasers Pulsers, Spark Igniters, RF Generators
- High Voltage DC-DC Converters
- High Voltage DC-AC Inverters

© 2010 IXYS Corporation, All Rights Reserved


Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	V_{DS} = 20V, I_D = 0.5 • I_{D25}, Note 1	17	28		S
C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		21		nF
C_{oss}			1100		pF
C_{rss}			77		pF
R_{Gi}	Gate input resistance		0.84		Ω
$t_{d(on)}$	**Resistive Switching Times**		70		ns
t_r	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		62		ns
$t_{d(off)}$	R_G = 1Ω (External)		88		ns
t_f			58		ns
$Q_{g(on)}$	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		360		nC
Q_{gs}			130		nC
Q_{gd}			160		nC
R_{thJC}				0.125	°C/W
R_{thCS}			0.05		°C/W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
I_S	V_{GS} = 0V			32	A
I_{SM}	Repetitive, Pulse Width Limited by T_{JM}			128	A
V_{SD}	I_F = I_S, V_{GS} = 0V, Note 1			1.5	V
t_{rr}	I_F = 20A, -di/dt = 100A/μs			300	ns
Q_{RM}	V_R= 100V, V_{GS} = 0V		1.9		μC
I_{RM}			15		A

Note 1. Pulse test, t ≤ 300μs, duty cycle, d ≤ 2%.

SOT-227B (IXFN) Outline

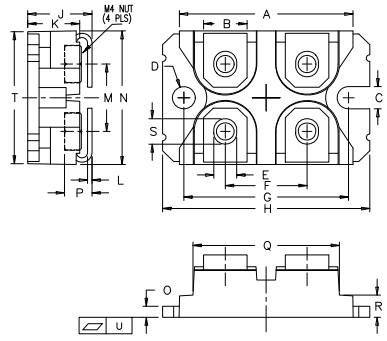

(M4 screws (4x) supplied)

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	1.240	1.255	31.50	31.88
B	.307	.323	7.80	8.20
C	.161	.169	4.09	4.29
D	.161	.169	4.09	4.29
E	.161	.169	4.09	4.29
F	.587	.595	14.91	15.11
G	1.186	1.193	30.12	30.30
H	1.496	1.505	38.00	38.23
J	.460	.481	11.68	12.22
K	.351	.378	8.92	9.60
L	.030	.033	0.76	0.84
M	.496	.506	12.60	12.85
N	.990	1.001	25.15	25.42
O	.078	.084	1.98	2.13
P	.195	.235	4.95	5.97
Q	1.045	1.059	26.54	26.90
R	.155	.174	3.94	4.42
S	.186	.191	4.72	4.85
T	.968	.987	24.59	25.07
U	-.002	.004	-0.05	0.1

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,850,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ T_J = 25ºC

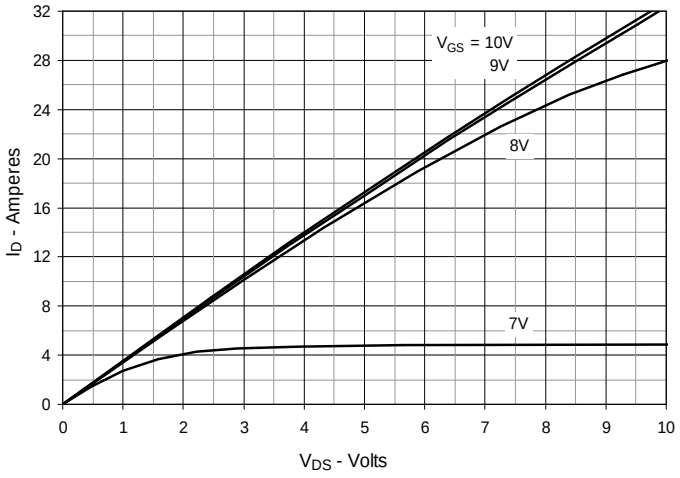


Fig. 2. Extended Output Characteristics @ T_J = 25ºC

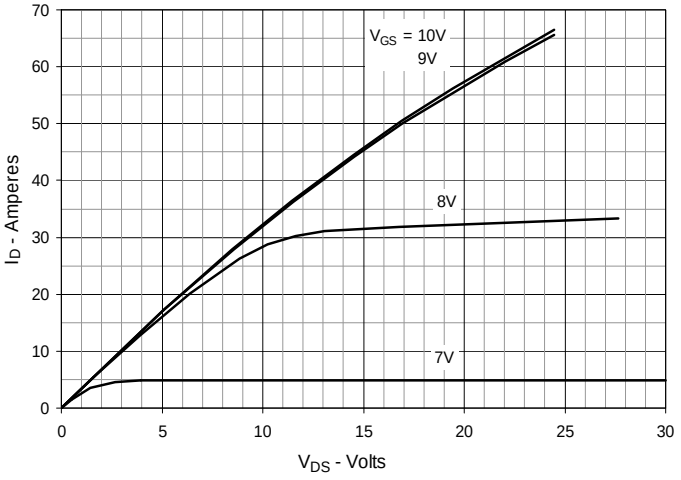


Fig. 3. Output Characteristics T_J = 125ºC

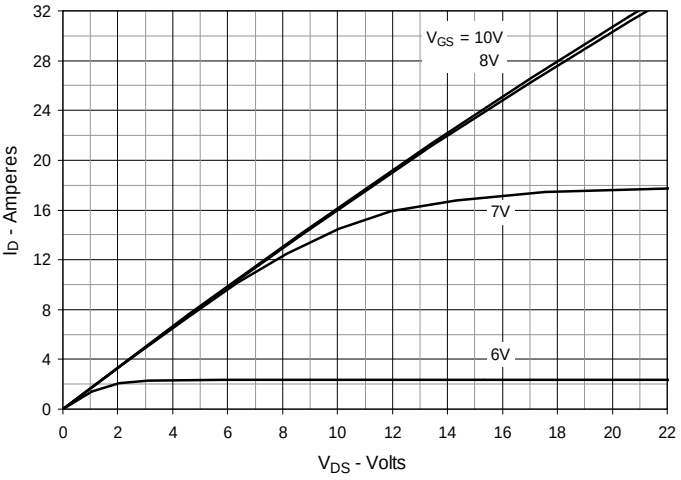


Fig. 4. $R_{DS(on)}$ Normalized to I_D = 16A Value vs. Junction Temperature

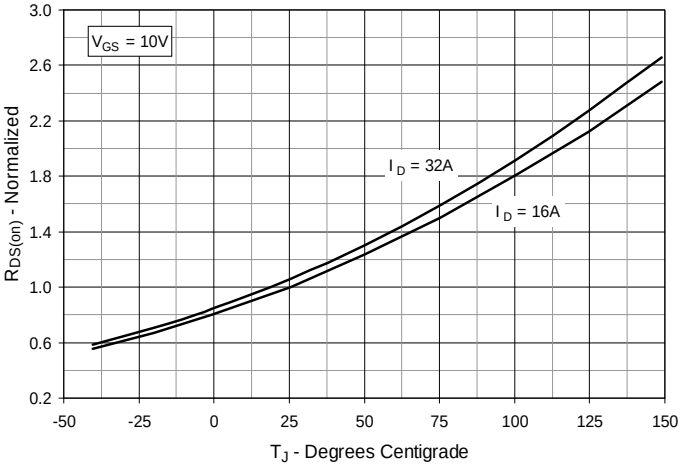


Fig. 5. $R_{DS(on)}$ Normalized to I_D = 16A Value vs. Drain Current


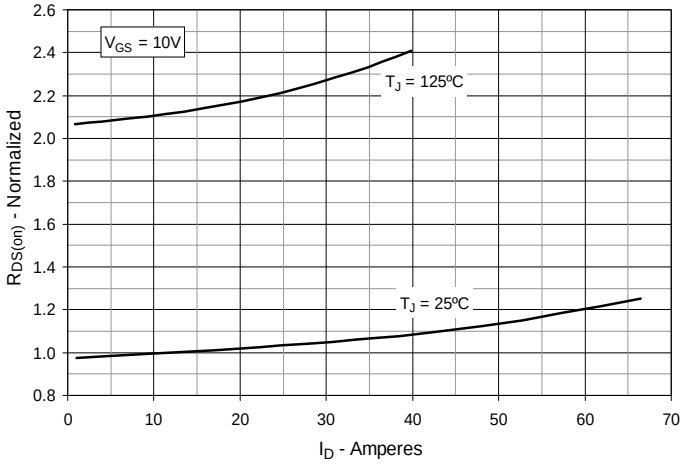


Fig. 6. Maximum Drain Current vs. Case Temperature

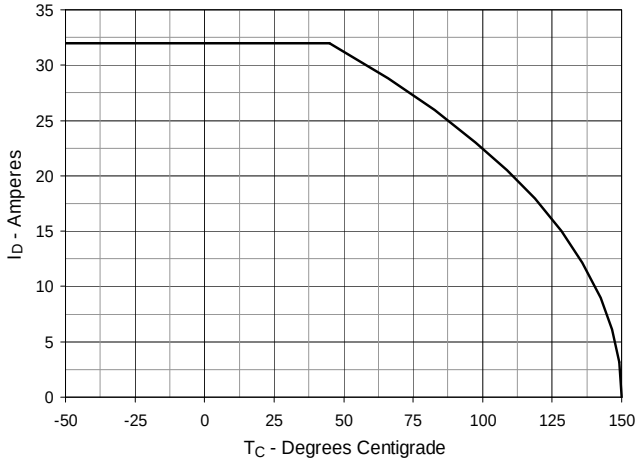

© 2010 IXYS Corporation, All Rights Reserved

Fig. 7. Input Admittance

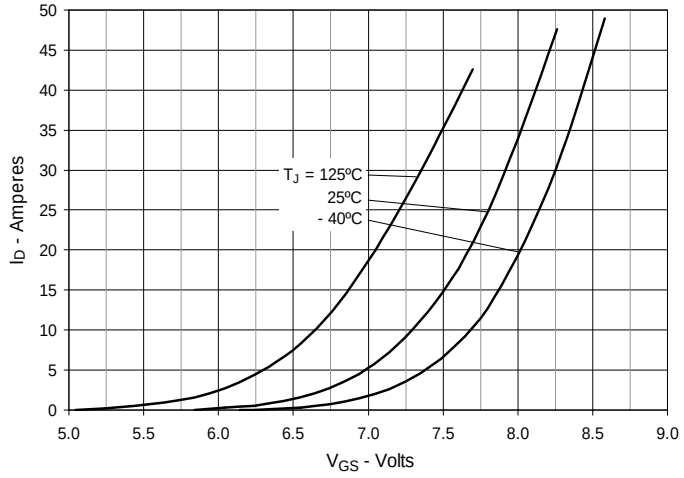


Fig. 8. Transconductance

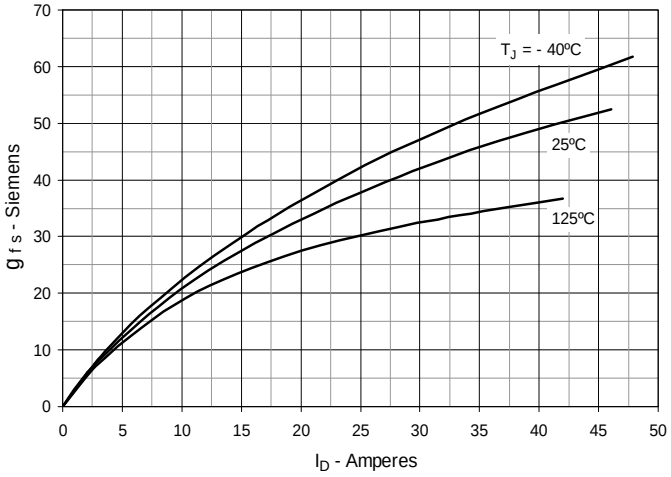


Fig. 9. Forward Voltage Drop of Intrinsic Diode

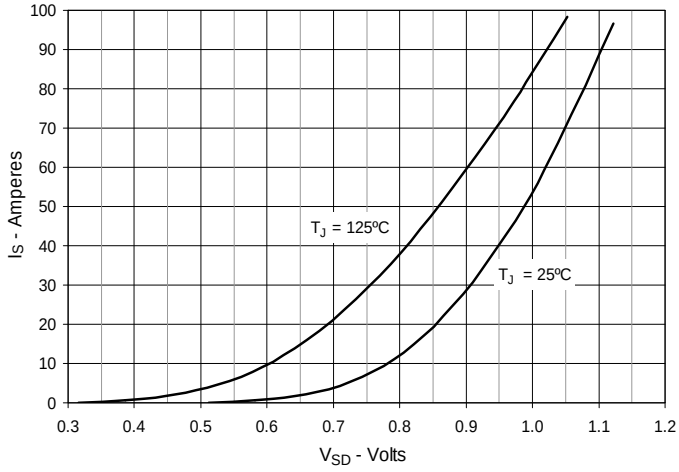


Fig. 10. Gate Charge

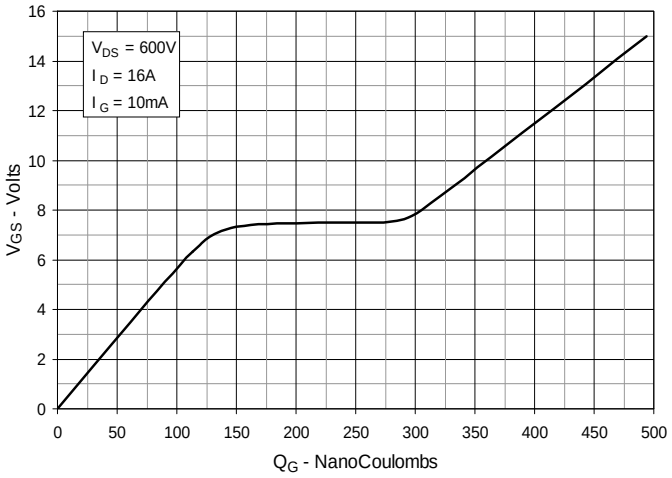


Fig. 11. Capacitance



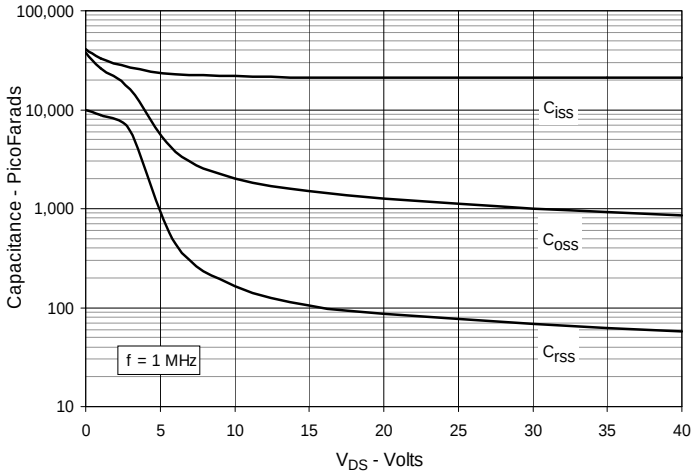


Fig. 12. Forward-Bias Safe Operating Area

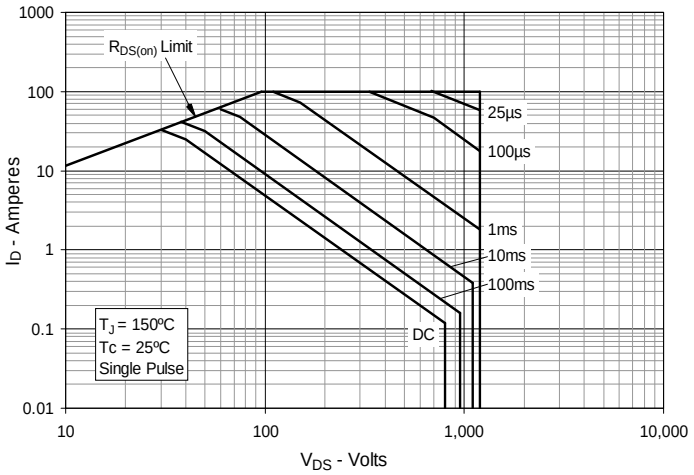

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 13. Maximum Transient Thermal Impedance

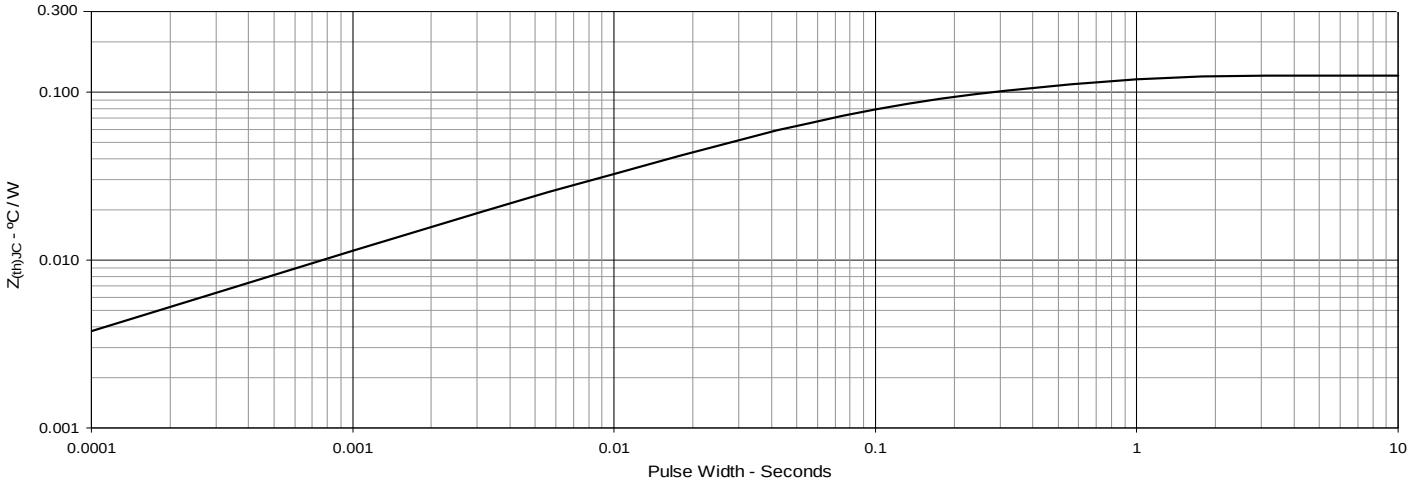

© 2010 IXYS Corporation, All Rights Reserved



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.