DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

KBK20A THRU KBK20M

TECHNICAL SPECIFICATIONS OF SINGLE-PHASE SILICON BRIDGE RECTIFIER

VOLTAGE RANGE - 50 to 1000 Volts *CURRENT - 20 Amperes*

FEATURES

* Low leakage
* Low forward voltage
* Surge overload rating: 240 Amperes peak
* Ideal for printed circuit boards
* High forward surge current capability

MECHANICAL DATA


* Case: Molded plastic
* Epoxy: UL 94V-0 rate flame retardant
* Terminals: MIL-STD-202E, Method 208 guaranteed
* Polarity: Symbols molded or marked on body
* Mounting position: Any
* Weight: 6.6 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.



KBK

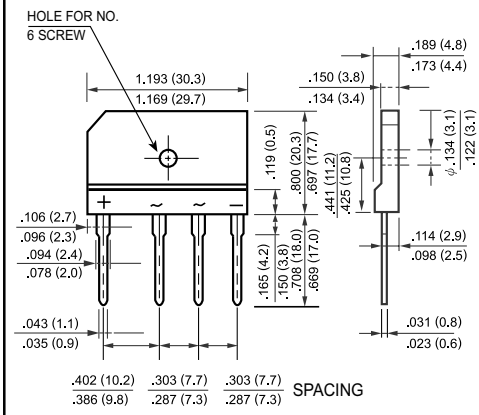

Dimensions in inches and (millimeters)


		SYMBOL	KBK20A	KBK20B	KBK20D	KBK20G	KBK20J	KBK20K	KBK20M	UNITS
Maximum Recurrent Peak Reverse Voltage		V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Bridge Input Voltage		V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Output Current at Tc = 100°C		I_O	20							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)		I_{FSM}	240							Amps
Maximum Forward Voltage Drop per element at 10 A DC		V_F	1.1							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage per element	@T_A = 25°C	I_R	10							uAmps
	@T_A = 100°C		500							
I^2t Rating for Fusing (t<8.3ms)		I^2t	240							A^2Sec
Typical Junction Capacitance (Note1)		C_J	60							pF
Typical Thermal Resistance (Note 2)		$R\theta JA$	12							°C/W
Operating Temperature Range		T_J T_{STG}	-55 to + 150							°C

NOTES : 1.Measured at 1 MHz and applied reverse voltage of 4.0 volts


2. Thermal Resistance from Junction to Case per element Unit mounted on 300x300x1.6mm Aluminum plate heat-sink.

NEXT BACK EXIT


TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

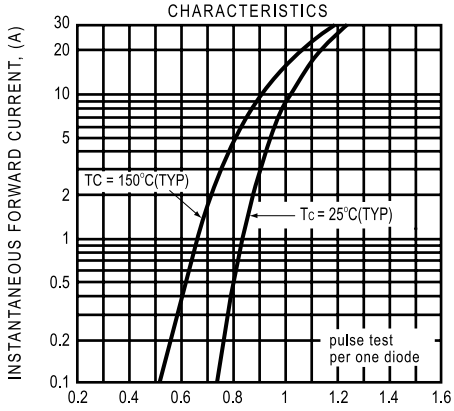


POWER DISSIPATION

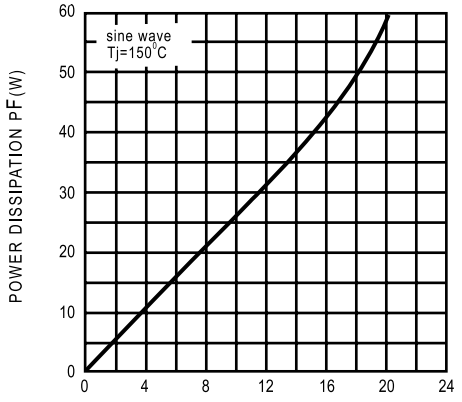


SURGE FORWARD CURRENT CAPABILITY

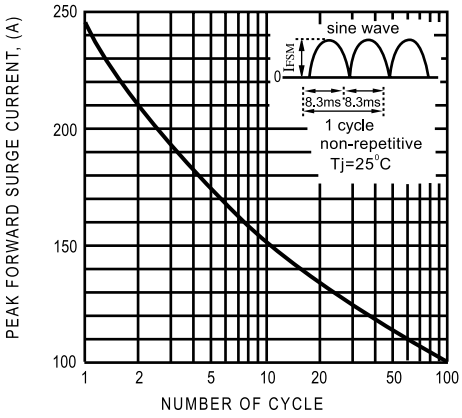


TYPICAL FORWARD CURRENT DERATING CURVE

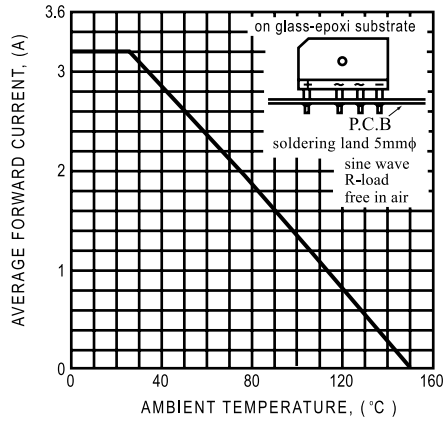

TYPICAL FORWARD CURRENT DERATING CURVE

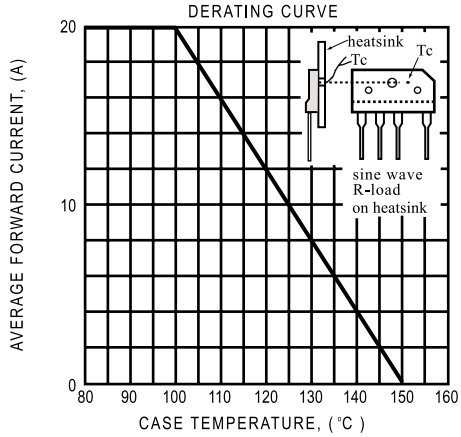

CONTACT THERMAL RESISTANCE ϕcf

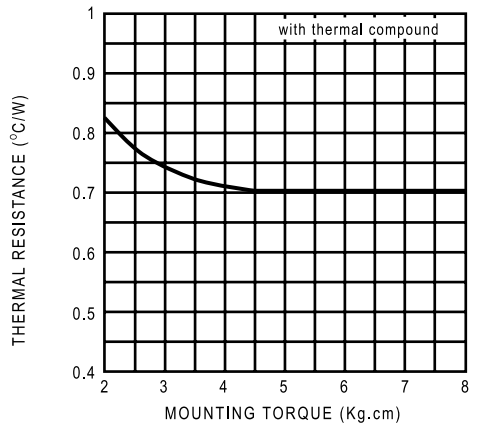

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.