

High Power Diode Modules

I_{FRMS} = 2x 450 A
I_{FAVM} = 2x 270 A
V_{RRM} = 1200-2200 V

V_{RSM} V	V_{RRM} V	Type
1300	1200	MDD 255-12N1
1500	1400	MDD 255-14N1
1700	1600	MDD 255-16N1
1900	1800	MDD 255-18N1
2100	2000	MDD 255-20N1
2300	2200	MDD 255-22N1



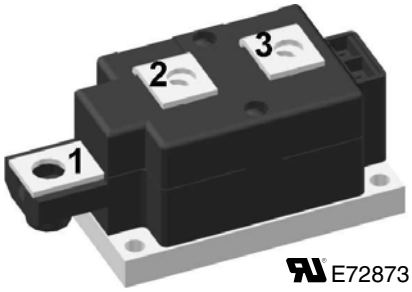

Symbol	Conditions			Maximum Ratings	
I_{FRMS}	$T_{VJ} = T_{VJM}$		T_C = 25°C	450	A
I_{FAVM}	180° sine		T_C = 100°C	270	A
I_{FSM}	T_{VJ} = 45°C;	t = 10 ms	(50 Hz)	9500	A
	V_R = 0	t = 8.3 ms	(60 Hz)	10200	A
	$T_{VJ} = T_{VJM}$;	t = 10 ms	(50 Hz)	8400	A
	V_R = 0	t = 8.3 ms	(60 Hz)	9000	A
I^2t	T_{VJ} = 45°C;	t = 10 ms	(50 Hz)	451 000	A^2s
	V_R = 0	t = 8.3 ms	(60 Hz)	437 000	A^2s
	$T_{VJ} = T_{VJM}$;	t = 10 ms	(50 Hz)	353 000	A^2s
	V_R = 0	t = 8.3 ms	(60 Hz)	340 000	A^2s
T_{VJ}				-40...+150	°C
T_{VJM}				150	°C
T_{stg}				-40...+125	°C
V_{ISOL}	50/60 Hz, RMS	t = 1 min		3000	V~
	$I_{ISOL} \leq$ 1 mA	t = 1 s		3600	V~
M_d	Mounting torque (M6)			4.5 - 7	Nm
	Terminal connection torque (M8)			11-13	Nm
Weight	Typical including screws			750	g

Symbol	Conditions		Characteristics Values	
I_{RRM}	$V_R = V_{RRM}$	$T_{VJ} = T_{VJM}$	30	mA
V_F	I_F = 600 A;	T_{VJ} = 25°C	1.4	V
V_{T0}	For power-loss calculations only		0.8	V
r_t		$T_{VJ} = T_{VJM}$	0.6	mΩ
R_{thJC}	per diode; DC current	other values see MCC 255	0.14	K/W
	per module		0.07	K/W
R_{thJK}	per diode; DC current		0.18	K/W
	per module		0.09	K/W
Q_S	I_F = 400 A; -di/dt = 50 A/µs; T_{VJ} = 125°C		700	µC
I_{RM}			260	A
d_S	Creeping distance on surface		12.7	mm
d_A	Creepage distance in air		9.6	mm
a	Maximum allowable acceleration		50	m/s^2

Data according to IEC 60747 and refer to a single diode unless otherwise stated.

Features

- International standard package
- Direct Copper Bonded Al_2O_3 ceramic with copper base plate
- Planar passivated chips
- Isolation voltage 3600 V~
- UL registered

Applications

- Supplies for DC power equipment
- DC supply for PWM inverter
- Field supply for DC motors
- Battery DC power supplies


Advantages

- Simple mounting
- Improved temperature & power cycling
- Reduced protection circuits

IXYS reserves the right to change limits, test conditions and dimensions.

© 2013 IXYS All rights reserved

Dimensions in mm (1 mm = 0.0394“)

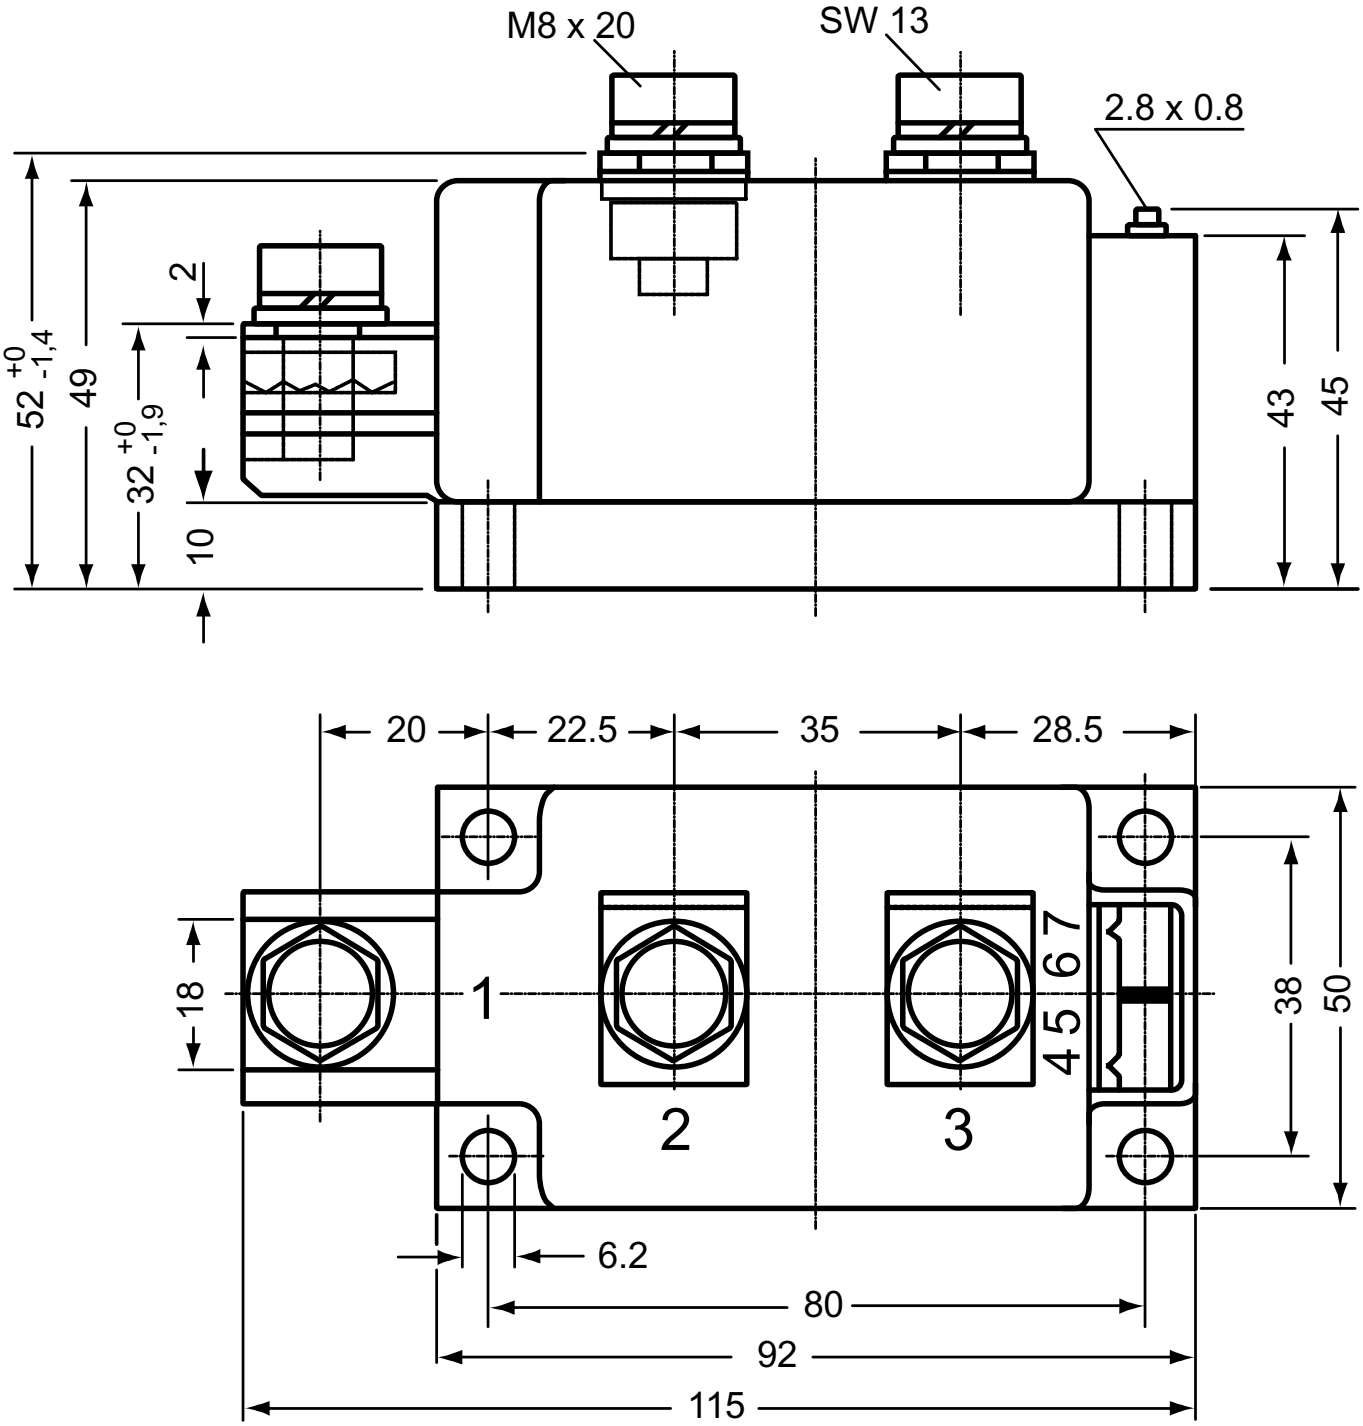

Optional accessories for modules
Keyed gate/cathode twin plugs with wire length = 350 mm, gate = white, cathode = red
Type ZY 180L (L = Left for pin pair 4/5)
Type ZY 180R (R = Right for pin pair 6/7)
} UL 758, style 3751

© 2013 IXYS All rights reserved

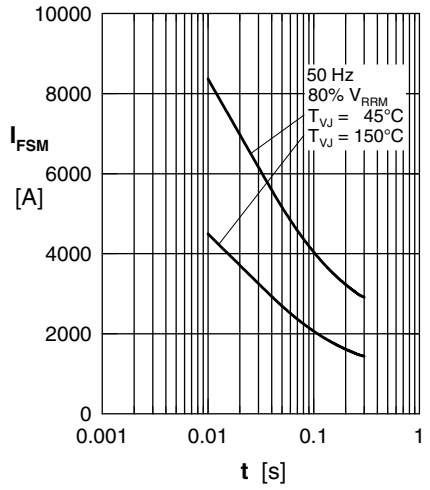


Fig. 1 Surge overload current
I_{FSM}: Crest value, t: duration

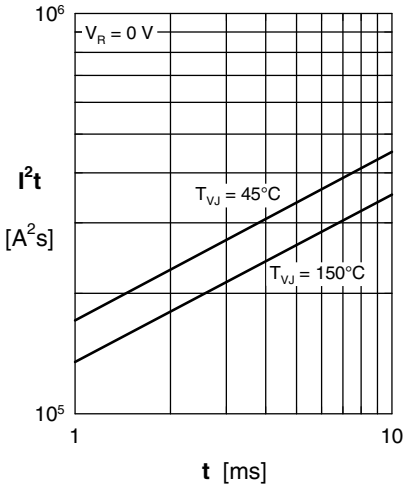


Fig. 2 I^2t versus time (1-10 ms)

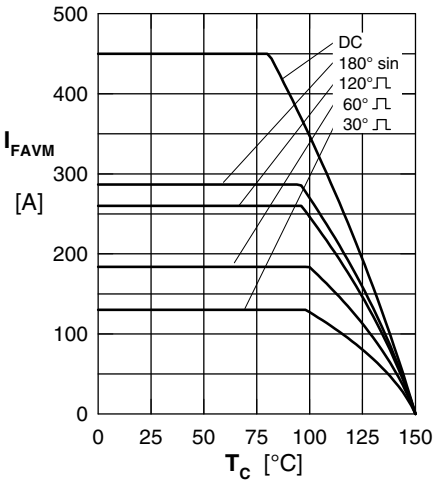


Fig. 3 Max. forward current at case temperature

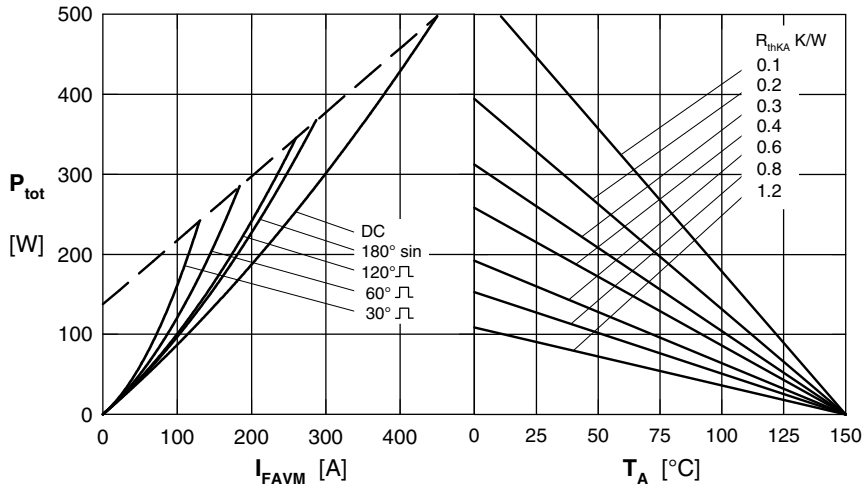


Fig. 4 Power dissipation vs. forward current & ambient temperature (per diode)

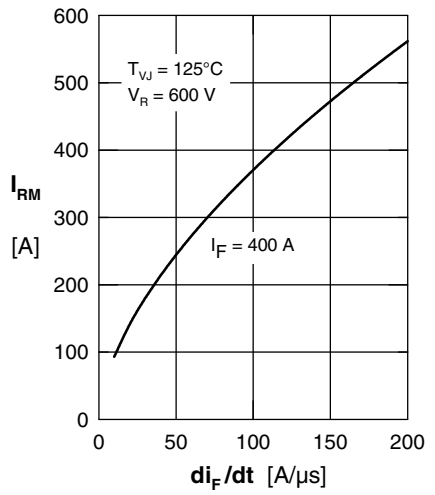


Fig. 5 Typ. peak reverse current I_{RM} versus -diF/dt

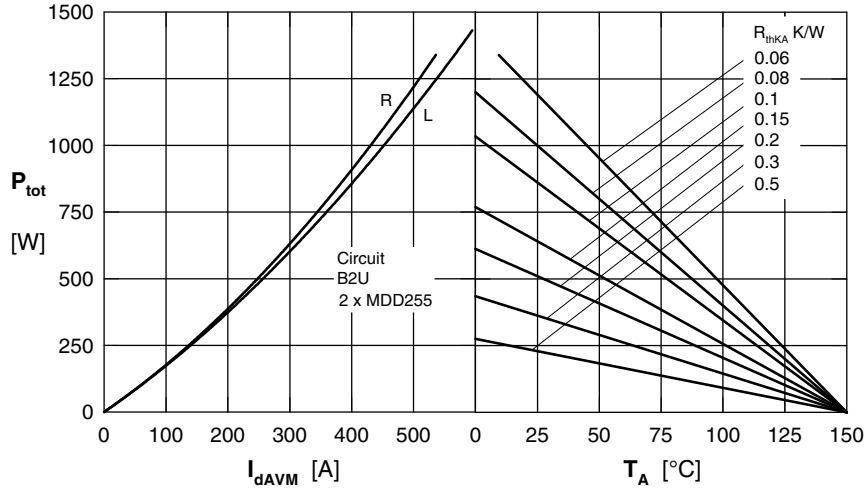


Fig. 6 Single phase rectifier bridge: Power dissipation vs. direct output current & ambient temperature. R = resistive load, L = inductive load

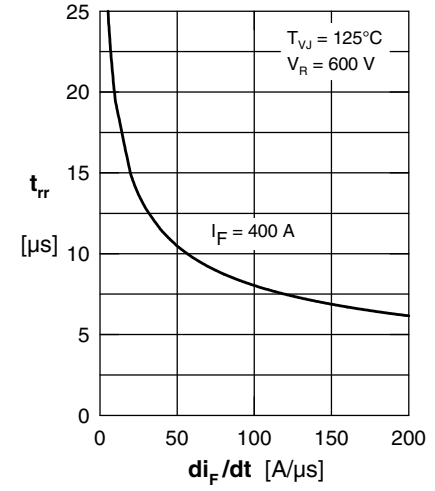


Fig. 7 Typ. recovery time t_{rr} versus -di_F/dt

IXYS reserves the right to change limits, test conditions and dimensions.

© 2013 IXYS All rights reserved


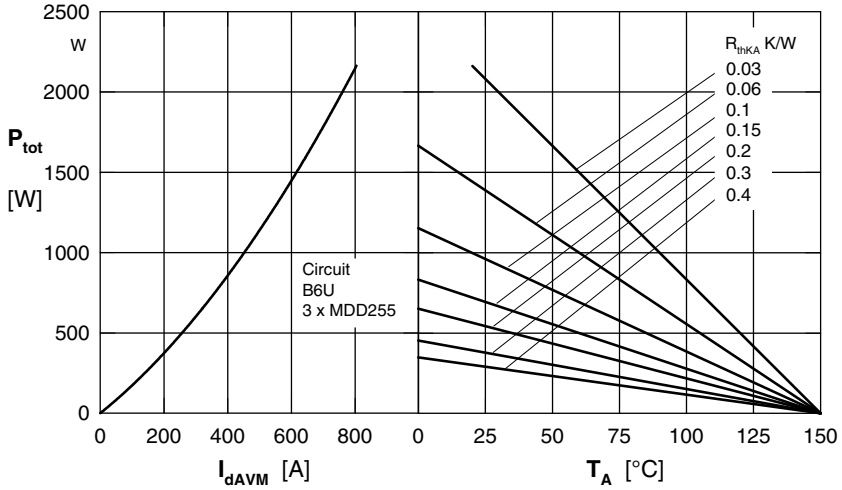


Fig. 8 Three phase rectifier bridge: Power dissipation versus direct output current and ambient temperature

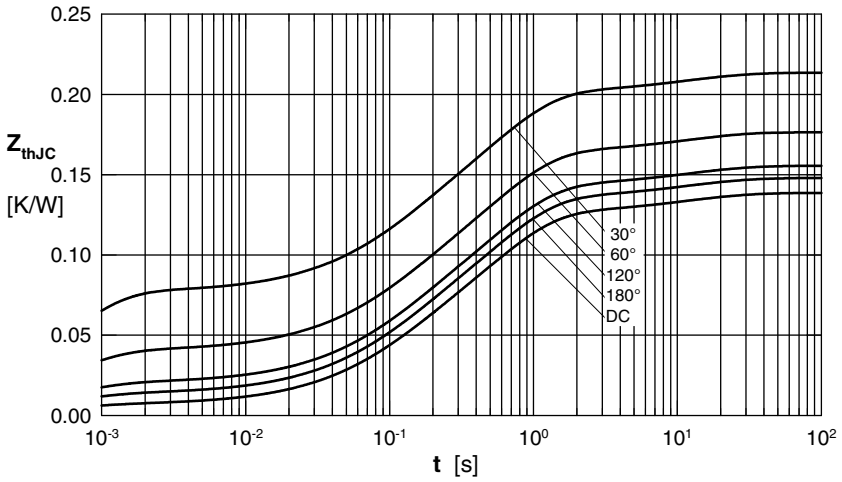


R_{thJC} for various conduction angles d:

d	R_{thJC} (K/W)
DC	0.139
180°	0.148
120°	0.156
60°	0.176
30°	0.214

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.0066	0.00054
2	0.0358	0.098
3	0.0831	0.54
4	0.0129	12

Fig. 9 Transient thermal impedance junction to case (per diode)

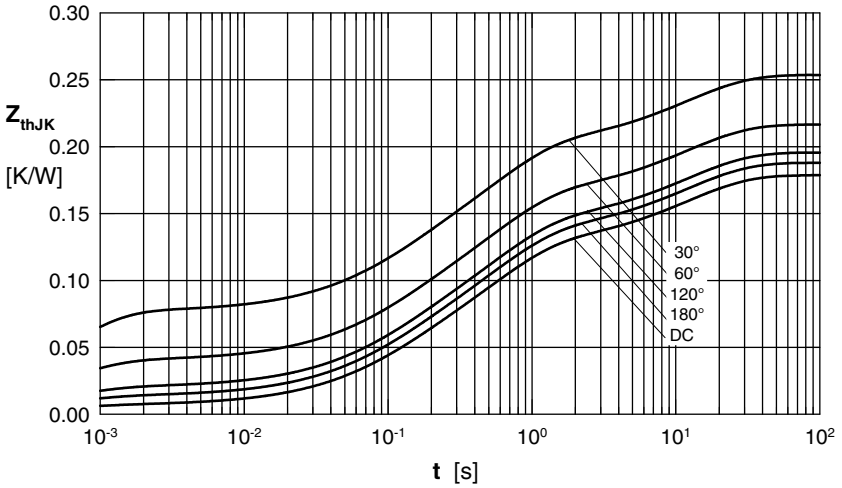

R_{thJK} for various conduction angles d:

d	R_{thJK} (K/W)
DC	0.179
180°	0.188
120°	0.196
60°	0.216
30°	0.254

Constants for Z_{thJK} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.0066	0.00054
2	0.0358	0.098
3	0.0831	0.54
4	0.0129	12
5	0.04	12

Fig. 10 Transient thermal impedance junction to heatsink (per diode)

IXYS reserves the right to change limits, test conditions and dimensions.

© 2013 IXYS All rights reserved