
SDD165N


Diode-Diode Modules



Type	V_{RSM} V	V_{RRM} V
SDD165N08	900	800
SDD165N12	1300	1200
SDD165N14	1500	1400
SDD165N16	1700	1600
SDD165N18	1900	1800



Dimensions in mm (1mm=0.0394")

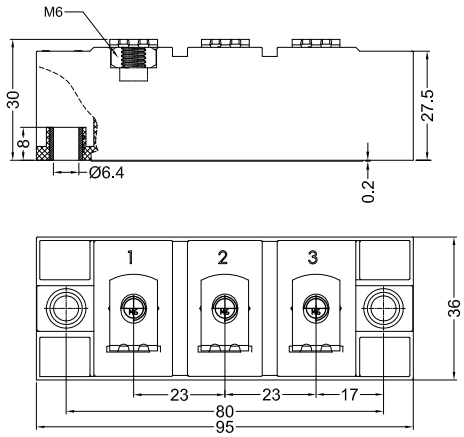

Symbol	Test Conditions		Maximum Ratings	Unit
I_{FRMS} I_{FAVM}	$T_{VJ}=T_{VJM}$ $T_C=100^oC$; 180° sine		260 165	A
I_{FSM}	$T_{VJ}=45^oC$ $V_R=0$	t=10ms (50Hz), sine t=8.3ms (60Hz), sine	4700 5000	A
	$T_{VJ}=T_{VJM}$ $V_R=0$	t=10ms(50Hz), sine t=8.3ms(60Hz), sine	4100 4300	
$\int i^2dt$	$T_{VJ}=45^oC$ $V_R=0$	t=10ms (50Hz), sine t=8.3ms (60Hz), sine	110000 104000	A^2s
	$T_{VJ}=T_{VJM}$ $V_R=0$	t=10ms(50Hz), sine t=8.3ms(60Hz), sine	84000 77000	
T_{VJ} T_{VJM} T_{stg}			-40...+150 150 -40...+125	°C
V_{ISOL}	50/60Hz, RMS $I_{ISOL}\leq 1mA$	t=1min t=1s	3000 3600	V~
M_d	Mounting torque (M6) Terminal connection torque (M6)		2.25-2.75/20-25 4.5-5.5/40-48	Nm/lb.in.
Weight	Typical		118	g

© 2008 SIRECTIFIER All rights reserved

www.sirectifier.com Tel: +86-519-86800000 Fax: +86-519-88019919 E-mail: sales@sirectifier.com

SDD165N

Diode-Diode Modules

Symbol	Test Conditions	Characteristic Values	Unit
I_R	$T_{VJ}=T_{VJM}$; $V_R=V_{RRM}$	20	mA
V_F	I_F=495A; T_{VJ}=25°C	1.25	V
V_{TO}	For power-loss calculations only	0.8	V
r_T	$T_{VJ}=T_{VJM}$	1.3	mΩ
Q_S	T_{VJ}=125°C; I_F=300A; -di/dt=50A/us	550	uC
I_{RM}		235	A
R_{thJC}	per diode; DC current per module	0.21 0.105	K/W
R_{thJK}	per diode; DC current per module	0.31 0.155	K/W
d_S	Creepage distance on surface	12.7	mm
d_A	Strike distance through air	9.6	mm
a	Maximum allowable acceleration	50	m/s^2

FEATURES

* International standard package
* DCB base plate
* Glass passivated chips
* Isolation voltage 3600 V~
* UL File NO.E310749
* RoHS Compliant

APPLICATIONS

* Supplies for DC power equipment
* DC supply for PWM inverter
* Field supply for DC motors
* Battery DC power supplies

ADVANTAGES

* Space and weight savings
* Simple mounting
* Improved temperature and power cycling
* Reduced protection circuits

Sirectifier®

© 2008 SIRECTIFIER All rights reserved

www.sirectifier.com Tel: +86-519-86800000 Fax: +86-519-88019019 E-mail: sales@sirectifier.com

SDD165N

Diode-Diode Modules

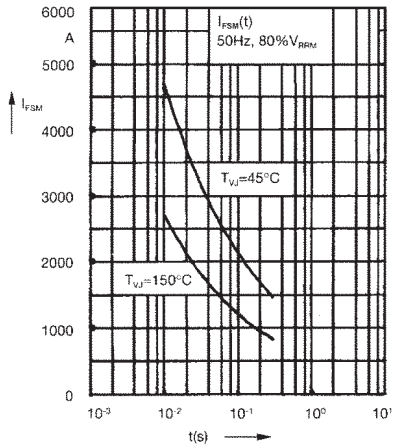


Fig. 1 Surge overload current
I_{FSM}: Crest value, t: duration

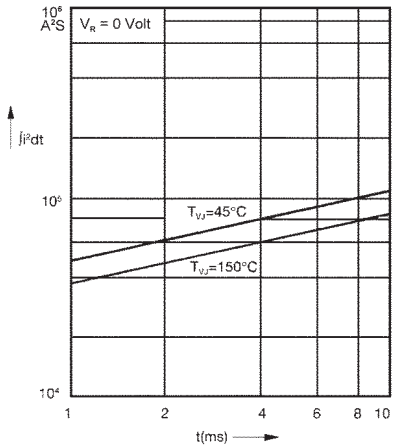


Fig. 2 $\int i^2dt$ versus time (1-10 ms)

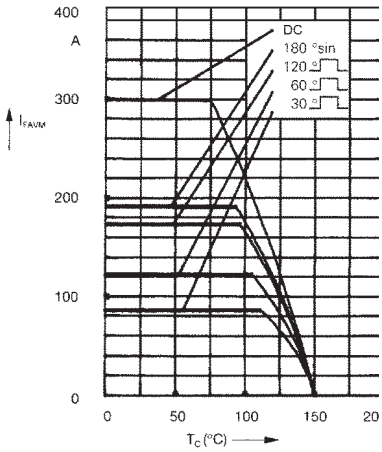


Fig. 2a Maximum forward current at case temperature

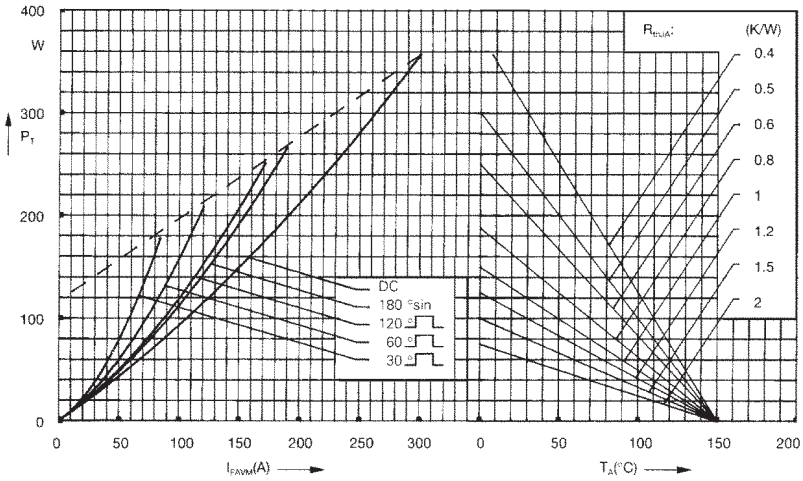


Fig. 3 Power dissipation versus forward current and ambient temperature (per diode)

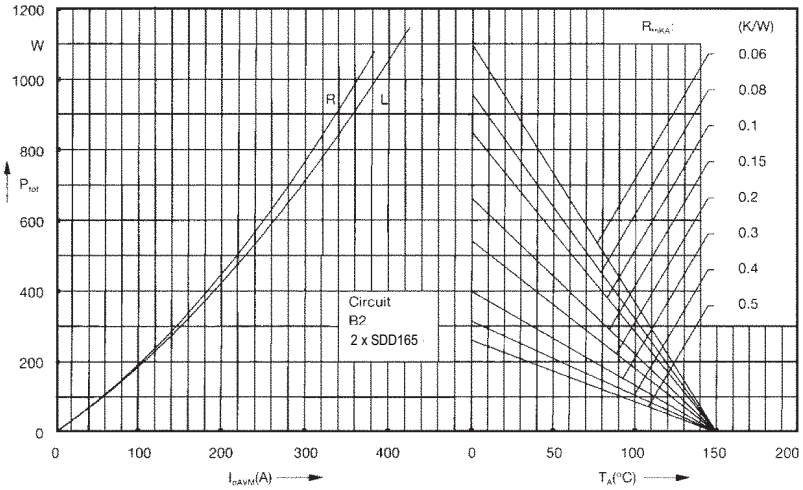


Fig. 4 Single phase rectifier bridge: Power dissipation versus direct output current and ambient temperature
R = resistive load
L = inductive load

© 2008 SIRECTIFIER All rights reserved

www.sirectifier.com Tel: +86-519-86800000 Fax: +86-519-88019919 E-mail: sales@sirectifier.com

SDD165N

Diode-Diode Modules

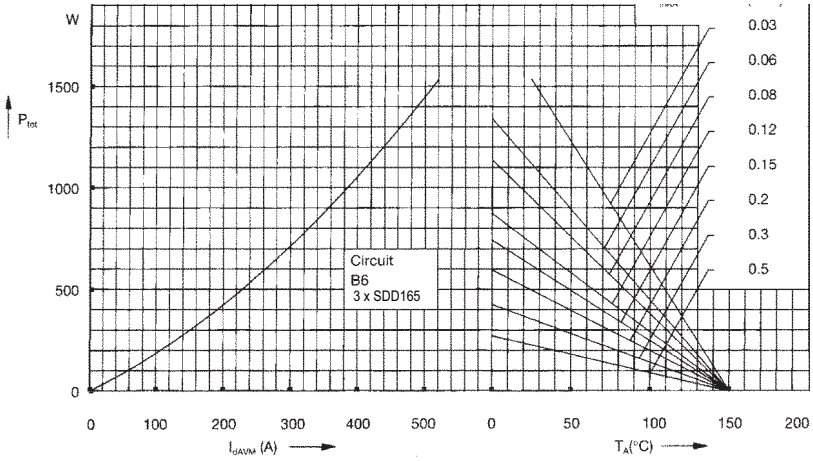


Fig. 5 Three phase rectifier bridge: Power dissipation versus direct output current and ambient temperature

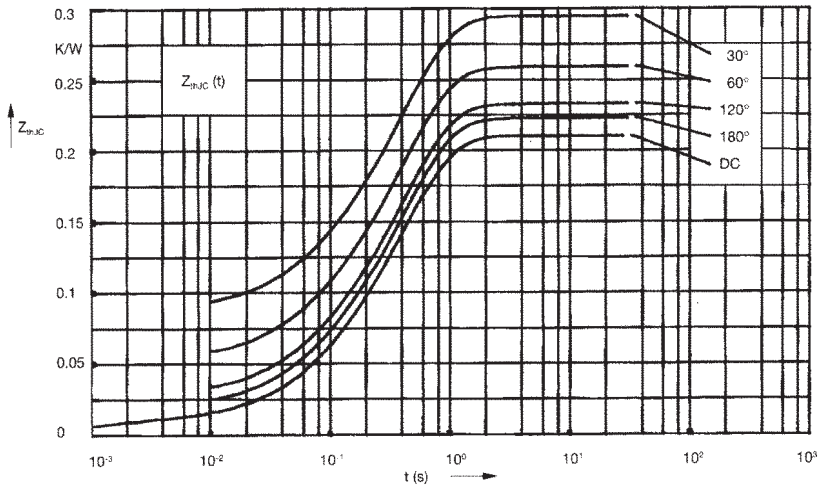


Fig. 6 Transient thermal impedance junction to case (per diode)

R_{thJC} for various conduction angles d:

d	R_{thJC} (K/W)
DC	0.210
180°C	0.223
120°C	0.233
60°C	0.260
30°C	0.295

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.0087	0.001
2	0.0163	0.065
3	0.185	0.4

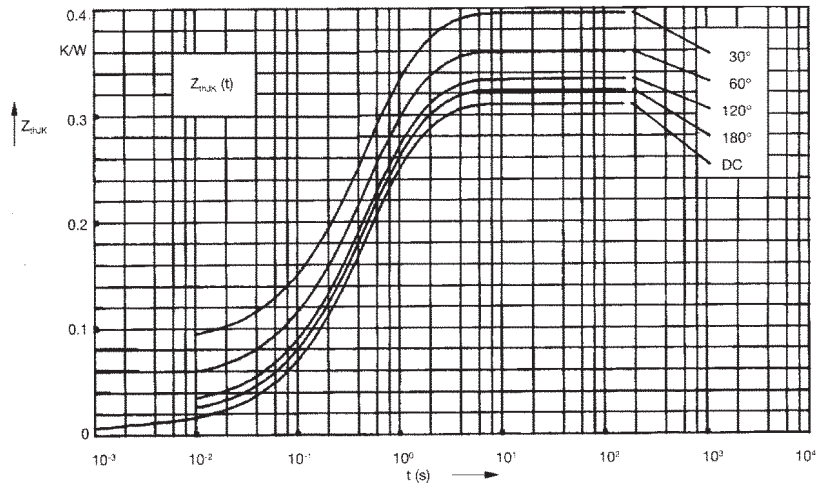


Fig. 7 Transient thermal impedance junction to heatsink (per diode)

R_{thJK} for various conduction angles d:

d	R_{thJK} (K/W)
DC	0.31
180°C	0.323
120°C	0.333
60°C	0.360
30°C	0.395

Constants for Z_{thJK} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.0087	0.001
2	0.0163	0.065
3	0.185	0.4
4	0.1	1.29

Sirectifier®

© 2008 SIRECTIFIER All rights reserved

www.sirectifier.com Tel: +86-519-86800000 Fax: +86-519-88019019 E-mail: sales@sirectifier.com