

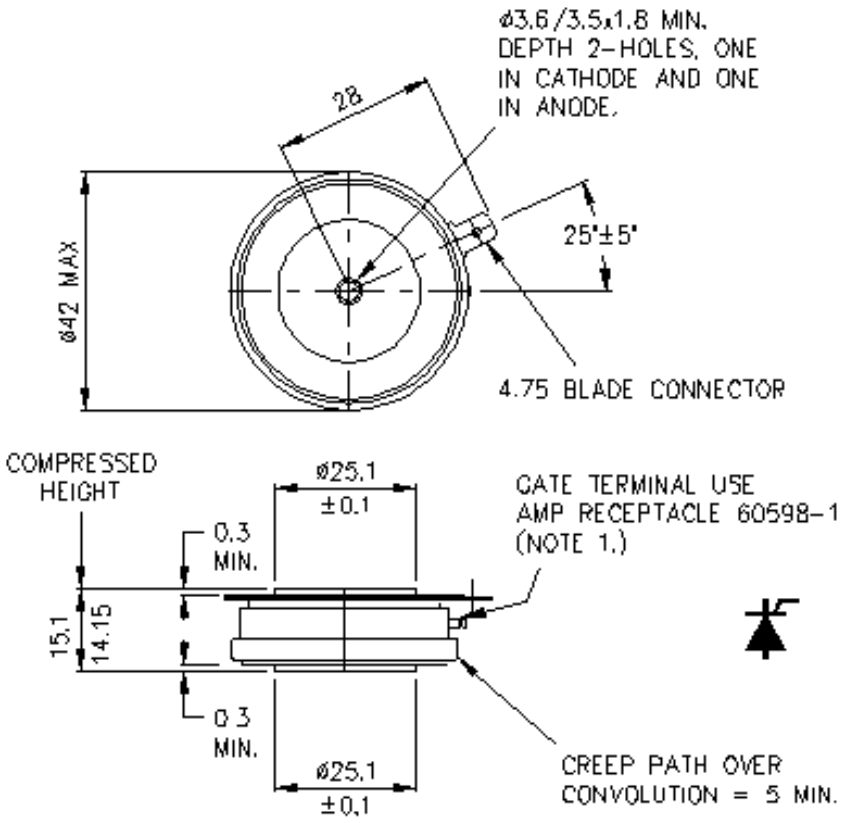


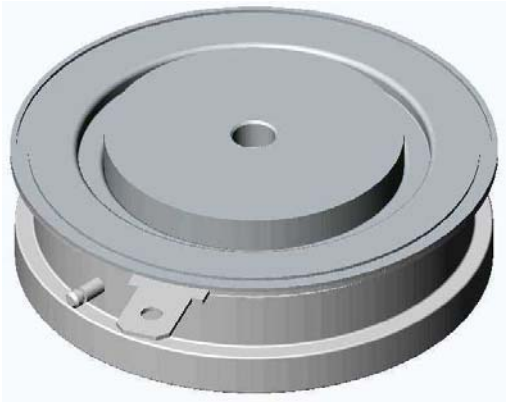


Weight 90g

Device family	Clamp part number	Clamp Force	T_{JMAX}	Maximum allowed height	Outline
		kgf	°C	mm	
Phase Control Thyristors (N), Fast Turn-off Thyristors (P) and Distributed Gate Thyristors (R) YS Housing	XK0550SA056M	550	190	49	WC4
	XK0550DA056M			57	WC5
	XSK0900Dx042M025	900	190	25	WC58-WC60
	XSK0900Dx042M031			31	
	XSK0900Dx042M038			38	
	XSK0900Dx042M044			44	
	XSK0900Dx042M050			50	
	XSK0900Dx042M057			57	
	XSK0900Dx042M063			63	
	XSK0900Dx042M069			69	
	XSK0900Dx042M076			76	

XK0550D/S

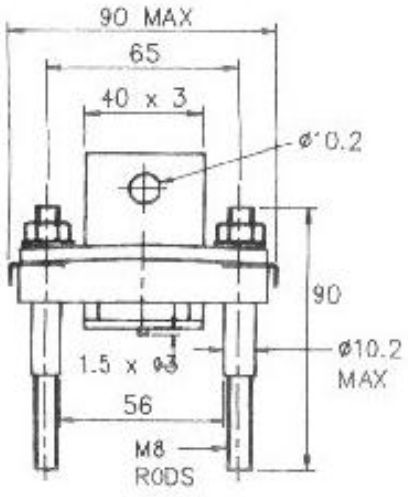



WC4 – SA Style

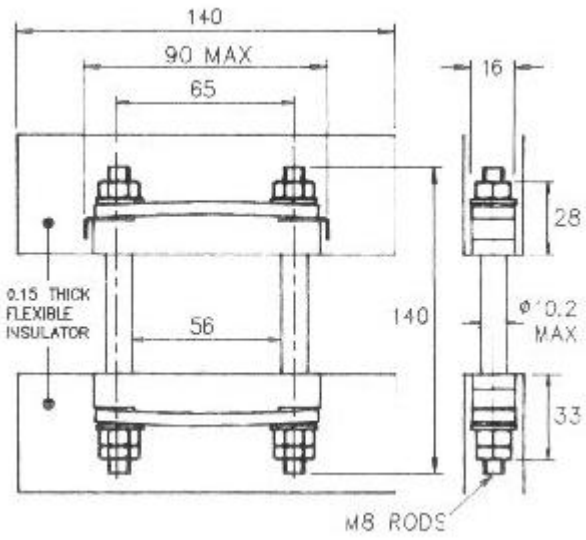


WC5 – DA Style


XSK0900Dx042







WC58 – DA Style





WC59 – DT Style



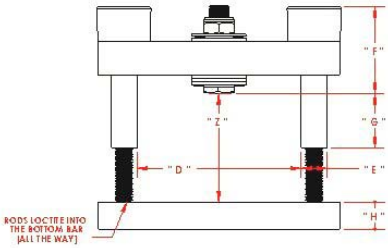

WC60 – DF Style

Dimensions (mm)

A – 69.85
B – 54.00
C – 15.88
D – 42.00
H – 12.70

Force [Kgf]	" E "	" F " (ref)	Bolt Type
500	8.64	32	M6
900	8.64	35.05	M6

Part #'s	" Z " min	" Z " max	" G " (ref)	
			00500	00900
XSK xxxxx xx 042 M 025	19.05	25.40	14.98	11.93
XSK xxxxx xx 042 M 031	25.40	31.75	14.98	17.01
XSK xxxxx xx 042 M 038	31.75	38.10	19.81	19.05
XSK xxxxx xx 042 M 044	38.10	44.45	21.84	22.09
XSK xxxxx xx 042 M 050	44.45	50.80	24.89	26.92
XSK xxxxx xx 042 M 057	50.80	57.15	29.97	28.95
XSK xxxxx xx 042 M 063	57.15	63.50	32.00	32.00
XSK xxxxx xx 042 M 069	63.50	69.85	34.79	37.08
XSK xxxxx xx 042 M 076	69.85	76.20	39.87	37.08